

BUS-1330-VF

**1.3 MP BULLET,
VARIFOCAL, POE, IP66,
IR 60 MTS, P2P, ONVIF**

Technical Specifications

Camera

| | |
|-------------------------|--|
| Image sensor | FH8330 |
| Resolution | 1080P |
| Effective Pixels | 1920(H)*1080(V) |
| TV System | PAL/NTSC |
| Electronic Shutter Time | Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec |
| Sync System | External |
| Usable Illumination | 0.01Lux |
| S/N Ratio | ≥52dB |
| Scanning System | Progressive |
| Video Output | Network |

Lens

| | |
|---------------|-----------|
| Focus Length | 2.8-12mm |
| Focus Control | Manual |
| Lens Type | Varifocal |
| Pixels | 2M Pixels |

Night Vision

| | |
|-------------------|---------------------|
| Infrared LED | 42μ x 6PCS |
| Infrared Distance | 60M |
| IR Status | Under 10 Lux By CDS |
| IR Power On | CDS Auto Control |

Camera Features


| | |
|------------------|---|
| Day/Night | Color/ B&W (IR-CUT) |
| Compression | H.264/JPEG,Support record AVI format |
| Image settings | Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control) |
| Motion Detection | Support |
| Privacy Masking | 3 Rectangular Zone |
| WDR | Yes |
| Recording Mode | NVR/NAS/CMS/Web |
| Language | Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian |

Package content

- 1 BUS-1330-VF camera
- Installation manual and CD

Main Features

- 1/2.5" Low Illumination CMOS Sensor
- H.264/H.264+ Compression Method
- 2.8-12mm Varifocal Lens
- IR Distance 40m Max.
- IP66 Outdoor Metal Case

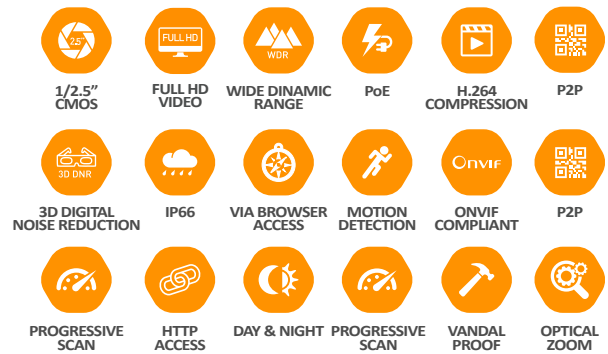

Network

| | |
|-------------------|---|
| Ethernet Protocol | RJ-45 (10/100Base-T) TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP, DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP |
| ONVIF | Support ONVIF 2.4 |
| P2P | YES, Support QR Code |
| POE | Optional, Support IEEE 802.3af |
| WIFI | N/A |
| Main Stream | 1920(H)*1080V |
| Sub Stream | 720*480@30fps |
| IE Brower | IE8-11, Firefox |
| Smart Phone | iPhone, iPad, Android, Android Pad |

General

| | |
|-----------------------|--------------------------|
| Housing | Weatherproof , IP66 |
| Anti-cut Bracket | Yes |
| IR Cut Filter | Yes |
| Operation Temperature | -10°C ~ +50°C RH95% Max |
| Storage Temperature | -20°C ~ +60°C RH95% Max |
| Power Source | DC12V±10%, 700mA |
| Dimension | 275(W)x90.5(H)x79.5(D)mm |
| Weight | 1.4kgs |