



BXS-4030

**4 MP, BOX, POE,ALARM
IN/OUT,C/CS MOUNT DC,
ONVIF 2.4**

Technical Specifications

Camera

Image sensor	DV4689
Resolution	4 MP
Effective Pixels	2688(H)*1520(V)
TV System	PAL/NTSC
Electronic Shutter Time	PAL 1/25-1/10000Sec; NTSC 1/25-1/10000Sec;
Sync System	External
Usable Illumination	0.01Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network/ CVBS

Lens

Focus Length	/
Focus Control	/
Lens Type	C/CS mount
Pixels	4 MP

Night Vision

Infrared LED	/
Infrared Distance	/
IR Status	/
IR Power On	/

Camera Features


Day/Night	Color/ B&W (IR cut filter with auto switch)
Compression	H.264/H.265/JPEG/AVI/MJPEG
Image settings	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
WDR	Support
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian

Package content

- 1 BXS-4030 camera
- Installation manual and CD

Main Features

- 1/3" CMOS Sensor
- H.265/H.264 Compression Method
- With Internal POE, SD Card Slot (Max. 64GB)
- Support Alarm In/Out, Support CVBS
- Support Reset Function
- Support C/CS Mount DC IRIS Lens

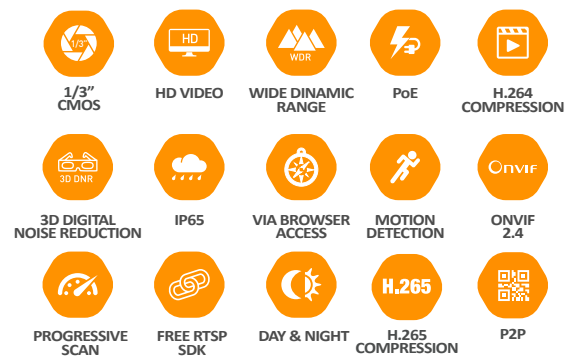

Network

Ethernet Protocol	RJ-45 (10/100Base-T) TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTCP, NTP, SMTP
ONVIF	Support ONVIF 2.4
P2P	YES, Support QR Code
POE	Optional, Support IEEE 802.3af
WIFI	N/A
Main Stream	2048*1536@30fps, 1920*1080@30fps
Sub Stream	720*480@30fps
IE Brower	IE8-11, Chrome
Smart Phone	iPhone, iPad, Android, Android Pad
SD Card Slot	support 64G Micro SD
Alarm	1 channel Input/Output

General

Housing	Metal (IP65)
Lens Angle Adjustment	No, Without Bracket
IR Cut Filter	Yes
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension	148(W)x79(H)x57(D)mm
Weight	585g