

# NVR-64008

**8MP DECODER, 8 HDD  
BAYS UPTO 64TB**

## Especificaciones técnicas

### System

<b>Operation System</b>	Windows 7 Embedded
<b>Network Protocols</b>	TCP/IP ,UDP, HTTP, HTTPS, SMTP,SNMPv3, DNS, DHCP, NTP, ARP, ICMP, FTPc, FTPs, DDNS, RTP (RTCP, RTSP), IGMPv3, UPnP, CIFS, NFS, IEC802.1x
<b>Watchdog Timer</b>	Hardware Watchdog, Software Watchdog
<b>Power Restoration</b>	Automatic restart after power outage
<b>System Update Protocol</b>	Support Upgradeable Onvif, RTSP
<b>Storage Capacity</b>	32 TB (16x HDDs), support RAID 0, 1, 5, 6/10
<b>Extended Storage Capacity</b>	32 TB (8x HDDs)
<b>Certification</b>	CE / FCC
<b>Language</b>	English, Spanish, French, Dutch, Italian, Japanese, Chinese.

### Audio/ Video


<b>IP Camera License</b>	64 Ch
<b>Display Performance</b>	64 display Channels at once. Dual streaming support
<b>Recording Speed</b>	More than 500M/Sec.
<b>Recording Resolution</b>	D1, 1.3~20-Megapixel
<b>Video Codec</b>	H.264, MPEG4, M-JPEG
<b>Audio Codec</b>	Two-Way Audio, G. 711, G.726, AAC
<b>Streaming Type</b>	Unicasting, Multicasting

### Software/ settings

<b>Privileges</b>	Camera settings, Export Video Clip, PTZ Control, Live View, Playback, Alarm Search, System Configuration, Remote access via schedule... etc.
<b>Recording Mode</b>	Continue/ Scheduled /By Event/ With Alarm/ By Motion Detected

## características principales

- 8 Megapixel decoder.
- 8 HDD bays up to 32TB.
- Hotswap.
- RAID 0/1/5/6.
- Dual LAN.
- Support Onvif/ RTSP Protocol

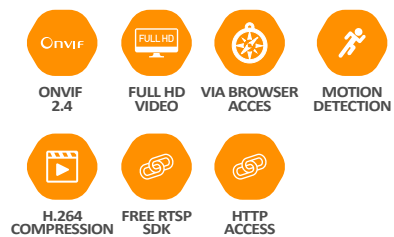

### E-map

**Video Compression** Camera type, Camera direction, Cameras and DI/DO points status, Map Hyperlink

### PTZ

**PTZ Control** PTZ Control via Mouse or Joystick, Preset Point, Patrolled, ePTZ

### Live video

**Display Pattern** 1, 2, 3, 4, 5, 6, 8, 9, 12, 13, 16, 25, 32 ,64 support multi monitors display, virtual video display, swap video position

### Playback

**Video Search** Search video via Time, Event, Alarm

**Simultaneous playback** up to 16ch; Play multi clips with a camera

**Video Playback** Time Slider Control Panel, Forward, Backward, Speed Control, Sync. Playback; frame by frame, Smart search

**Video exportation** Auto back up, Manual back up, Merge video with AVI format

## Especificaciones técnicas

### IVS

<b>Intelligent Video Analytics*1</b>	Object Counting, People Counting, Intrusion Alarm, Unattended and Missing Object Detection, Scene Change Detection, Object search, Panorama View, Privacy Mask, Loitering Detection, Abnormal Crowd Activity, Lose Focus Detection, Video Occlusion Detection. Illegal parking
--------------------------------------	--

### Event

<b>Event Log</b>	Login in/out, Operation, transactions, events with cameras, system.
<b>Event Search</b>	Search by event or schedule

### Alarm

<b>Alarm items</b>	Lost video Event Triggered, HDD failed, System Crashed, Abnormal Transaction, E-fence, Video Motion Detection
<b>Alarm Notification</b>	Pop-up, E-mail, SMS, FTP, DI/DO, Trigger Recording/snapshot/Speed dome

### Remote control

<b>Web client</b>	IE 8.0 or above version
<b>APP Client</b>	iOS (iPhone, iPad), Android phone
<b>CMS Client</b>	AnyNet-CMS server, FreeView Pro software

### Integration

<b>Public Address POS</b>	I-View's intelligent PA system built-in POS and paste the transaction data on the live and recording as built-in functions; Also alarm Popup and Search video in case of abnormal transactions
<b>Access control</b>	I-View's Access controller and paste the entry user data on the live and recording as built-in functions; Alarm Popup and Search video in case of data entry

### Hardware / Network

<b>LAN Port</b>	Ethernet RJ-45, 10 / 100 / 1000 Mbps x 2; Auto Negotiation
-----------------	--

### Display

<b>Monitor</b>	3 displays with outputs VGA, DVI-D and HDMI
<b>Display Resolution</b>	Maximum resolution 4096x2160@24Hz/ 2560x1600 @60Hz

### Storage

<b>Hard Disk Trays</b>	08 Hot- Swap Bays
<b>Storage Capacity</b>	Maximum 32TB; (08 x 4TB SATA III HDD)
<b>RAID Level</b>	RAID 0, 1, 5, 6, 10

### Ports

<b>USB Port</b>	USB 2.0 front x2; USB 2.0 Back x4 and USB 3.0 x 2
<b>Alarm I/O</b>	16 Alarm input & 7 Alarm output (Optional)

### Power

<b>Power Voltage</b>	100~240 Vac, 50-60 Hz
<b>Redundant Power Supply</b>	Redundant Power supply (Optional)

### Environment

<b>Operation</b>	Temperature 0°C ~ 50°C; Humidity 8% ~ 90% (N/An-condensing)
<b>Storage</b>	Temperature -40°C ~ 70°C; Humidity 5% ~ 95% (N/An-condensing)
<b>Back Up</b>	HDD/DVD-R/DVD+R/DVD+RW/ DVD-RW/CD-R/CD-RW/NAS/Disk Array

### Appearance

<b>Dimensions</b>	483 x 89 x 660 (mm) / 19 x 3.5 x 26 (in)
<b>Net Weight</b>	24Kg

### contenido del packaging

- 1 NVR NVR-64008
- CD y Manual de instalación