


SPECIFICATIONS

Standard	NEMA 17
Step angle	1.8° ±5%
Current / Phase	0.4A
Voltage / Phase	8V
Phase No.	2
Resistance	20 ± 10% Ω
Insulation resistance	100MΩ (500V DC)
Inductance	35 ± 20% mH
Insulation class	B
Holding torque	3.5kgf.cm

DIAGRAM

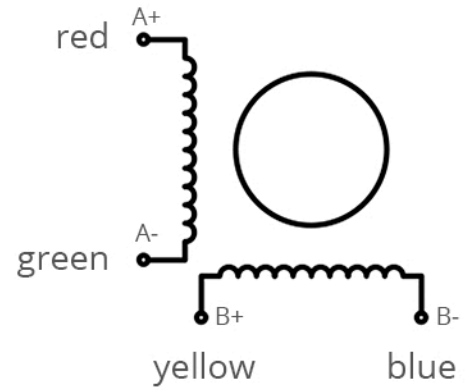

DIMENSIONS

UNIT: mm

